

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)

PCT

(10) International Publication Number
WO 2004/056468 A1

(51) International Patent Classification⁷: B01J 8/42, 19/12 (74) Agent: KEIL & SCHAAFHAUSEN; Cronleitstrasse 66, 60322 Frankfurt am Main (DE).

(21) International Application Number:

PCT/EP2003/013209

(81) Designated States (national): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.

(22) International Filing Date:

25 November 2003 (25.11.2003)

(25) Filing Language:

English

(26) Publication Language:

English

(30) Priority Data:
102 60 743.5 23 December 2002 (23.12.2002) DE

(84) Designated States (regional): ARIPO patent (BW, GH, GM, KB, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

(71) Applicant (for all designated States except US): OUTOKUMPU OYJ [FI/FI]; Riihitontuntie 7, FIN-02200 Espoo (FI).


Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: TREATMENT OF GRANULAR SOLIDS IN A FLUIDIZED BED WITH MICROWAVES

(57) Abstract: This invention relates to a method for the thermal treatment of granular solids in a fluidized bed (3, 3a) which is located in a fluidized-bed reactor (1, 1a), wherein microwave radiation is fed into the fluidized-bed reactor (1, 1a) through at least one wave guide (5), and to a corresponding plant. To improve the efficiency of the microwave irradiation, the irradiation angle of the microwaves is inclined by an angle of 10° to 50°, in particular 10° to 20°, with respect to the principal axis (11) of the fluidized-bed reactor (1, 1a).

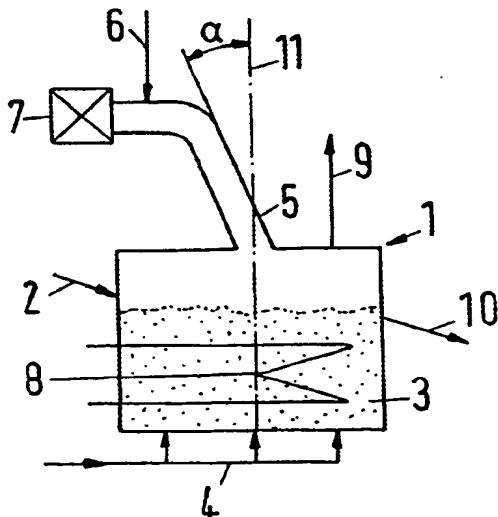

WO 2004/056468 A1